
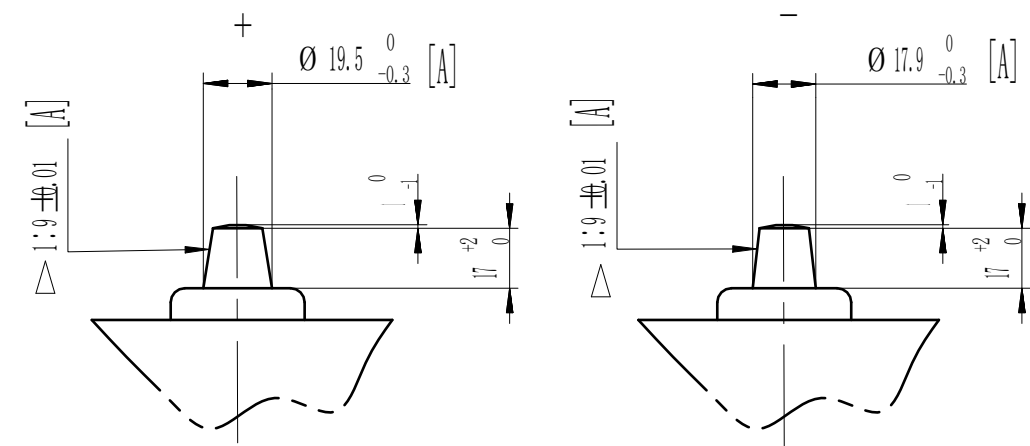


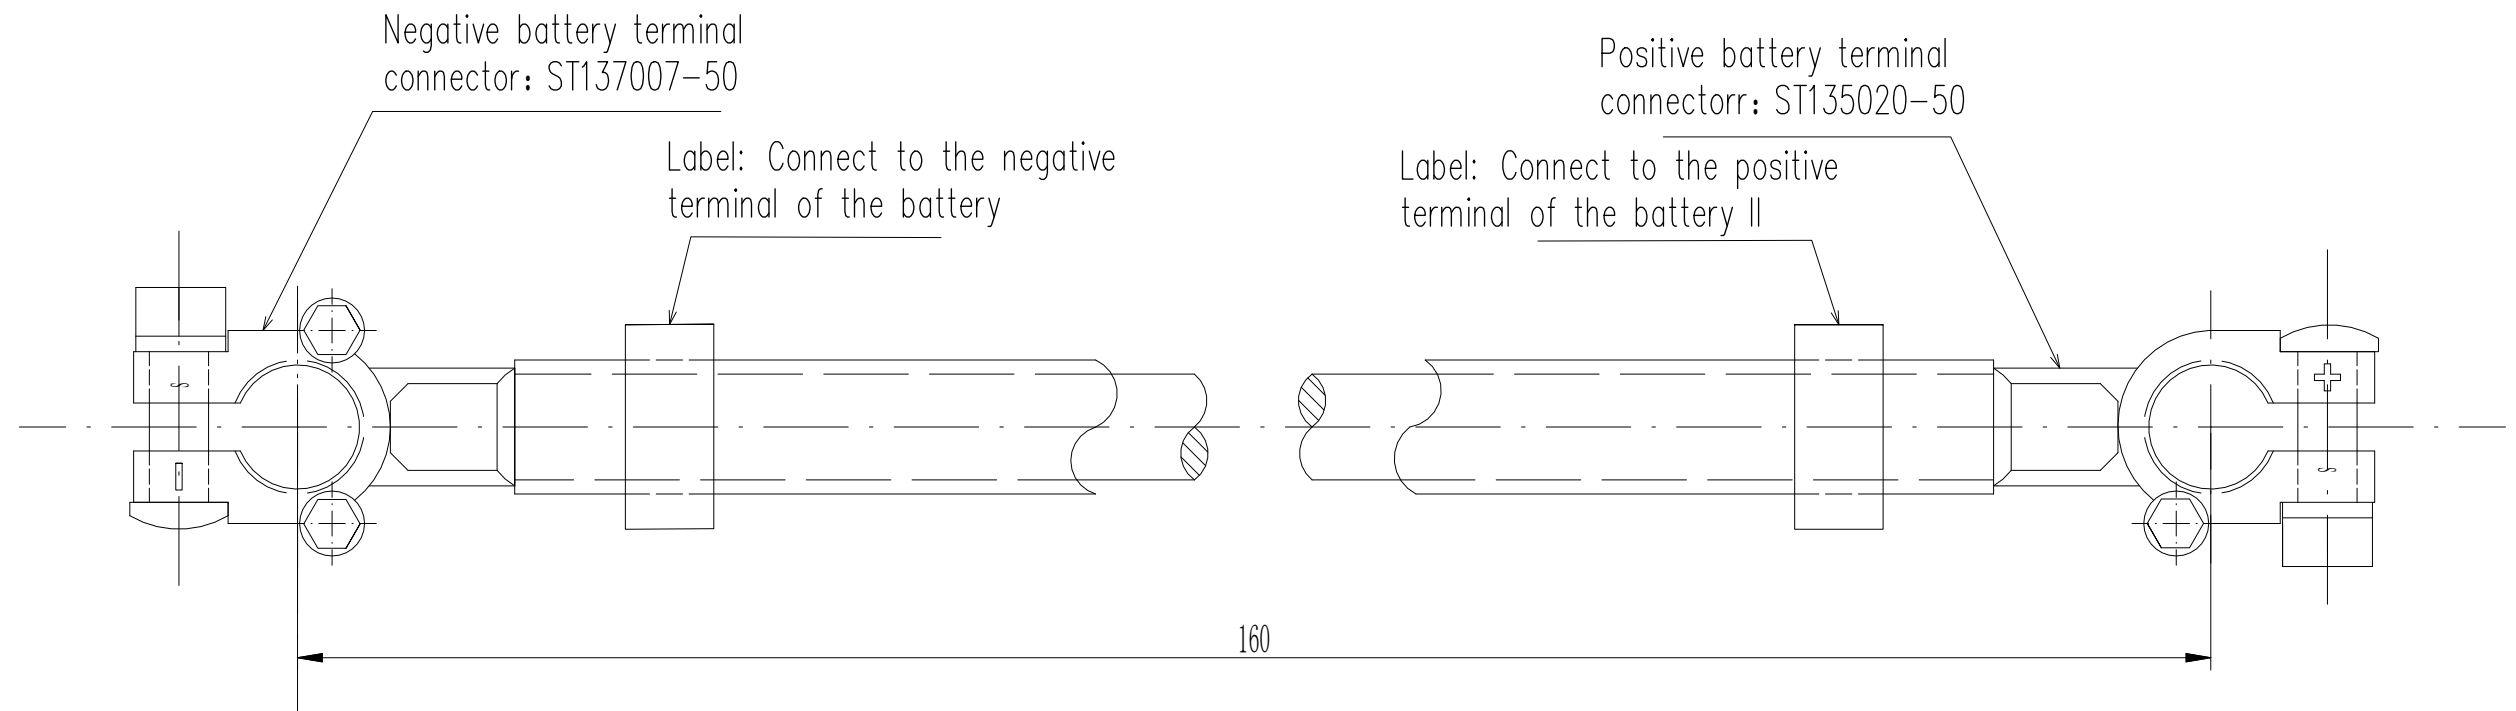

Technical requirements:

1. Ensure that the battery clamp is securely connected;
2. The conductor uses QVR-105 50mm² (soft wire), with a black color;
3. The size of the battery post head is shown in the right figure, [A] is the key size;
4. The view direction is a top view after the battery cable is installed on the battery;
5. Functional identification adopts yellow identification pipe, wire number wear-resistant and clear and reliable;
6. Permanent waterproof labels are pasted at the main connector of the harness, including the harness number, name, version number, production date, supplier information, etc.

XGA40EHLF4A2-611010_Wire assembly –
battery (I) negative to battery (II) positive