


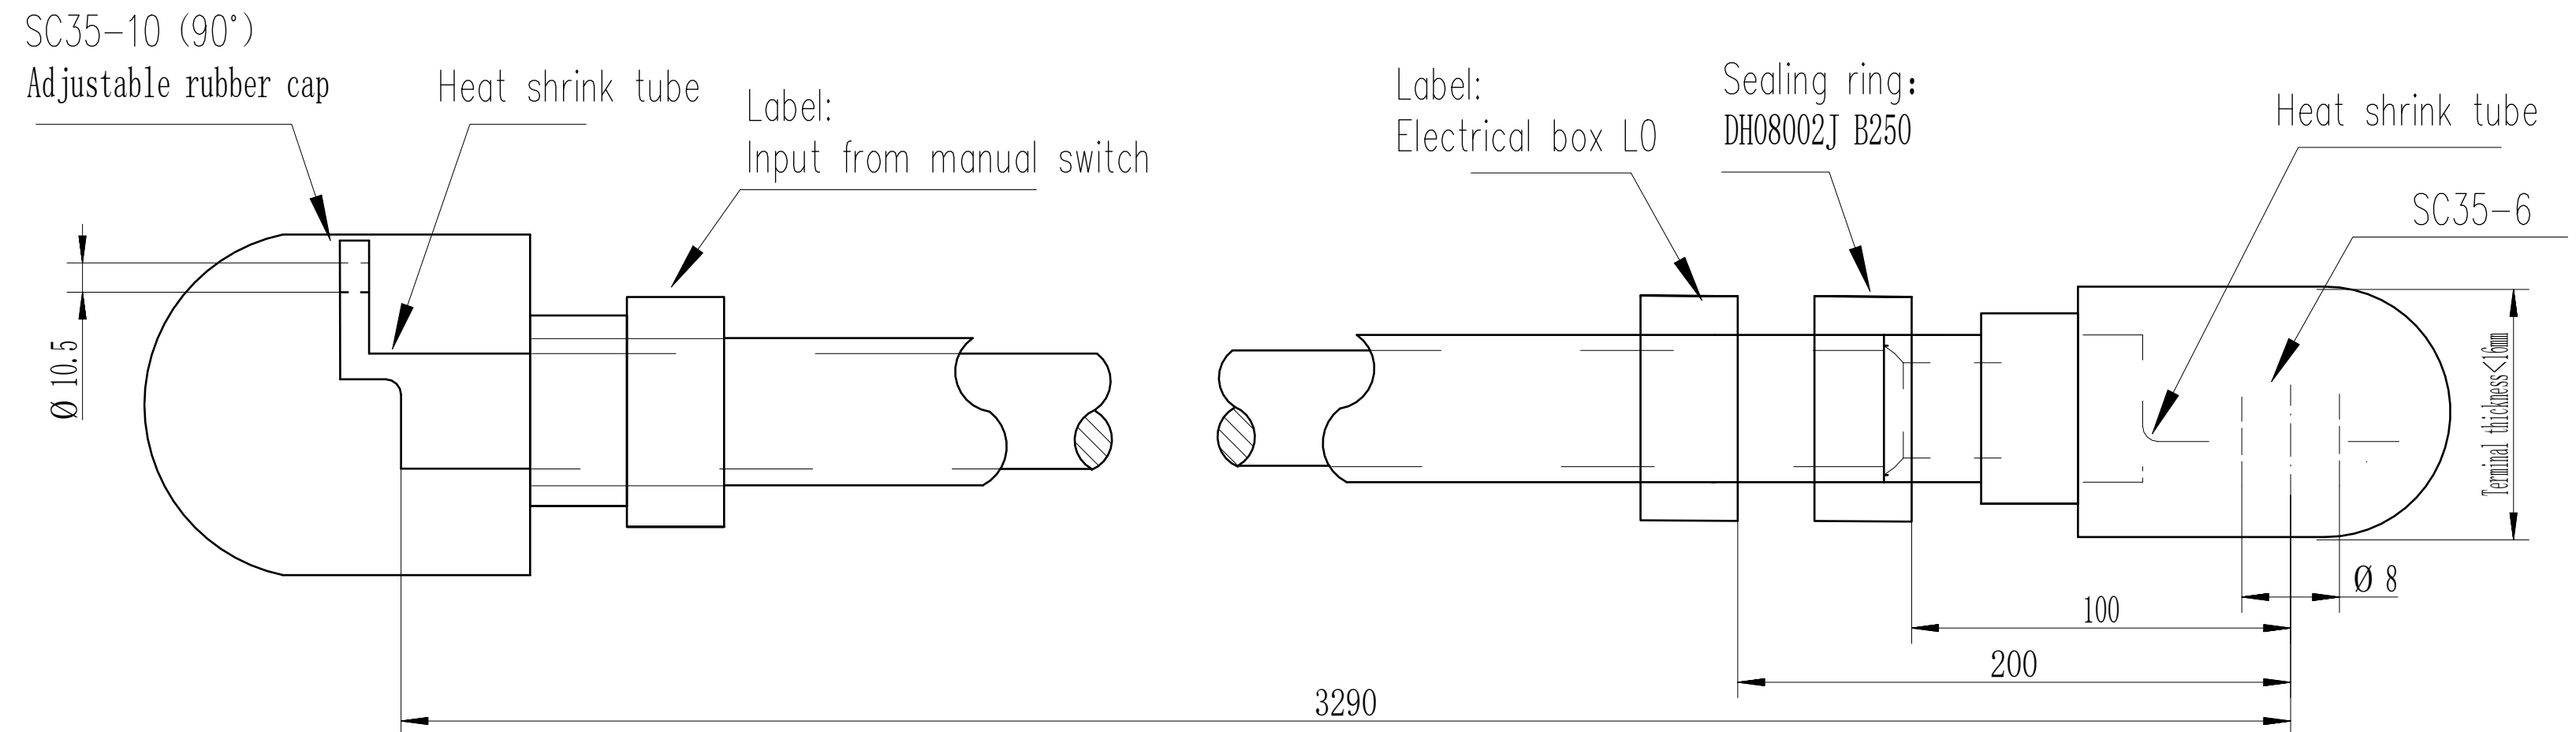

Protection of the outer jacket PCV hose, black waterproof tape fixed at 100mm from the terminal at both ends of the PVC hose

Technical requirements:

1. The battery clamp and terminal are firmly pressed;
2. The conductor uses QVR-105 35mm² (soft wire), with a black color;
3. Terminal jacket insulating cap, material EPDM;
4. The size of the battery post head is shown in the right figure, [A] is the key size;
5. The view direction is a top view after the battery cable is installed on the battery;
6. Functional identification adopts yellow identification pipe, wire number wear-resistant and clear and reliable;
7. Permanent waterproof labels are pasted at the main connector of the harness, including the harness number, name, version number, production date, supplier information, etc.
8. The SC series cold-press terminal uses a closed cold-press terminal.