


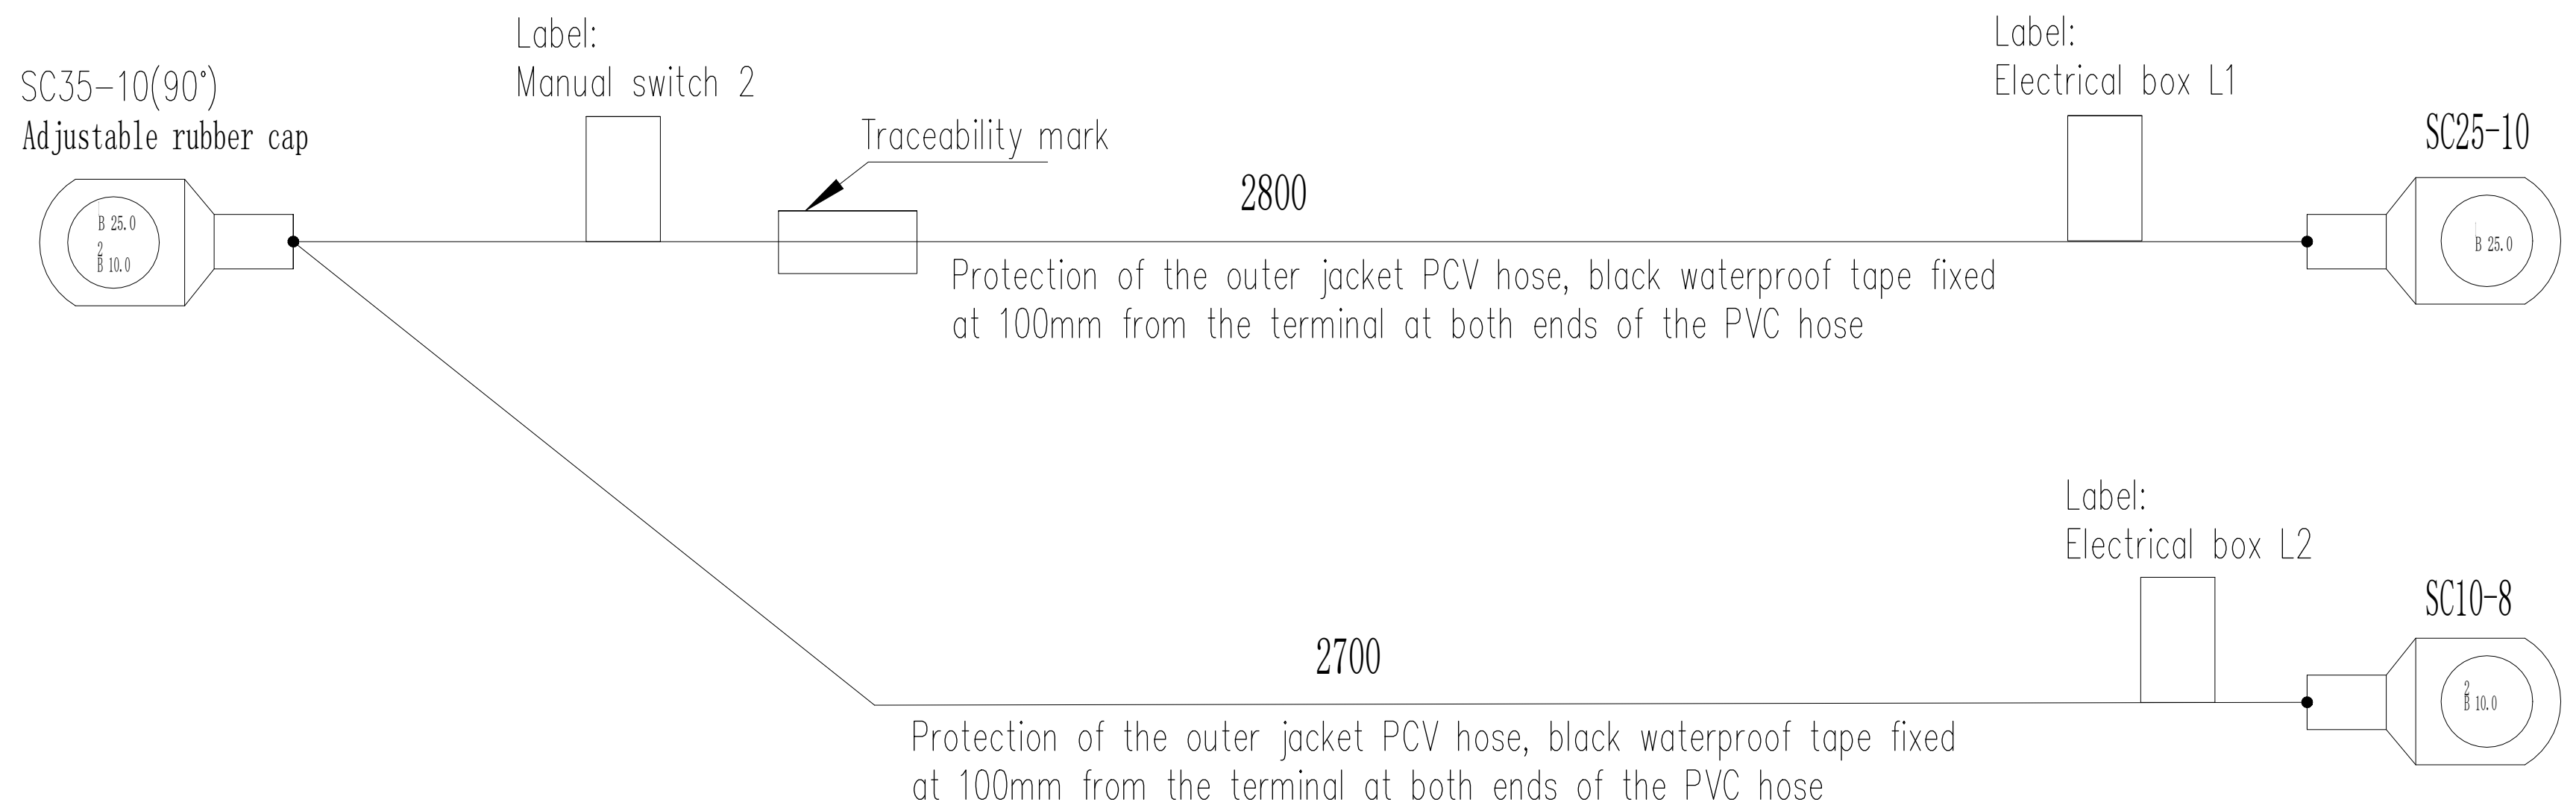

Technical requirements:

1. The battery clamp and terminal are firmly pressed;
2. The conductor uses FRY German standard thin-walled insulated wire, and the color is black;
3. Functional identification adopts yellow identification pipe, with wear-resistant and clear and reliable font, 100mm from the end of the terminal;
4. Permanent waterproof labels are pasted at the main connector of the harness, including the harness number, name, version number, production date, supplier information, etc.
5. The SC series cold-press terminal adopts a closed cold-press terminal.

XGA40EXLL5F1-611040_
Power Switch Box – Manual Switch