

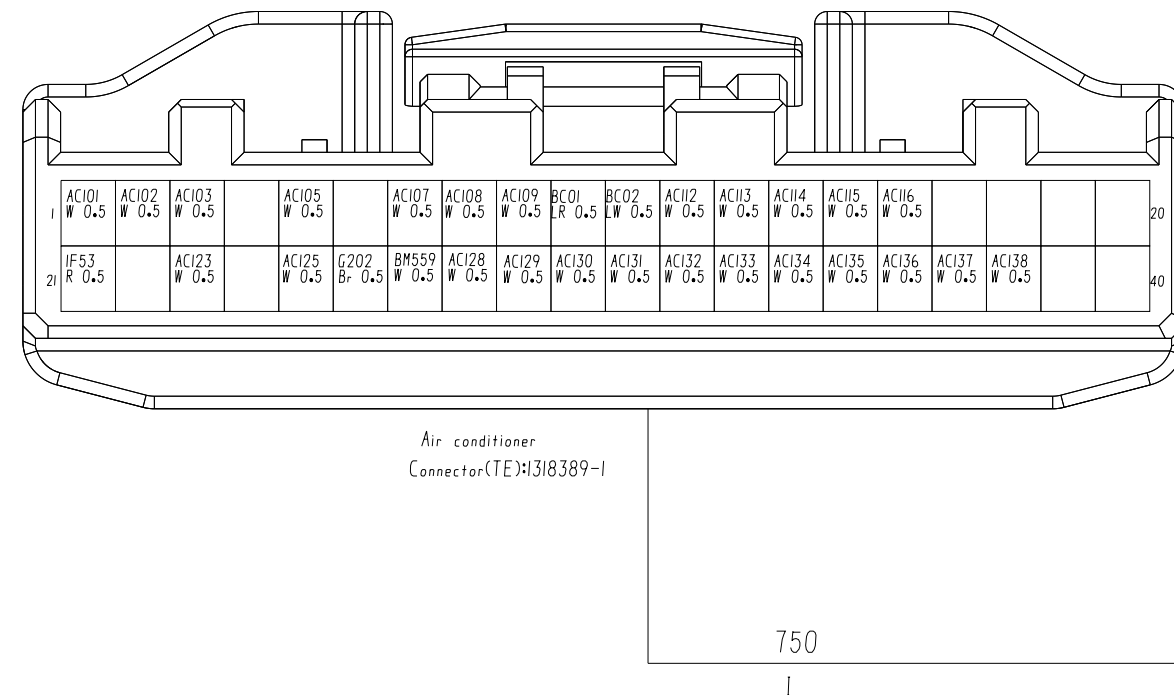


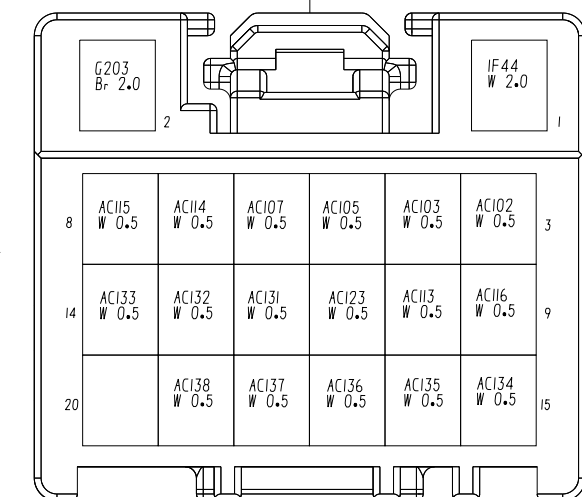

AC101 W 0.5	IF44 W 2.0
	AC112 W 0.5
	AC116 W 0.5
	IF53 R 0.5
AC129 W 0.5	AC130 W 0.5
AC125 W 0.5	AC108 W 0.5
BC01 LR 0.5	BC02 LW 0.5
AC128 W 0.5	BM559 W 0.5
G202 Br 0.5	G203 Br 2.0

A/C Connector
Connector(THB):PP045680I

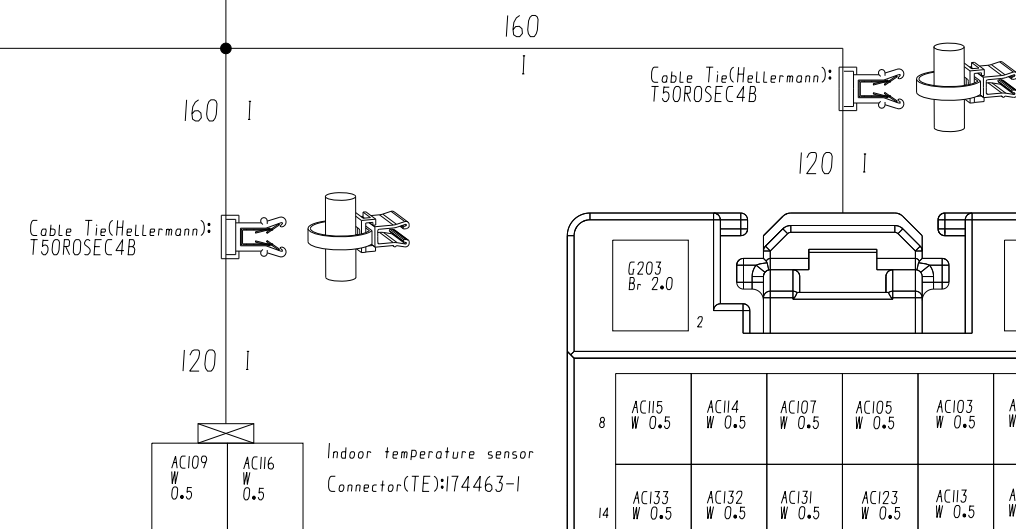


Technical requirement:

1. The cables are made of German standard FLRY-B type wires, which can withstand temperatures ranging from -40°C to 105°C ;
2. Wrap the exterior of the wire harness completely with black velvet tape;
3. The wire numbers are printed on the wires at intervals of 15mm by a spray coder, and the wire numbers are clear and reliable;
4. The wire harness complies with the requirements of QC/T 29106-2014;
5. Permanent waterproof labels are affixed to the main connectors of the wire harness, including the wire harness drawing number, name, version number, production date, and supplier information, etc;
6. Unless otherwise specified, the view direction shall be as shown in the following figure (when the pin numbers of the connector do not match the view, the view direction shall prevail);



7. The requirements for the twisted wire are as shown in the figure below: 40 twists per meter, and the anti-loose wrapping of the twisted wire should comply with the content specified in section 4.3.5 of QC/T29106-2014;

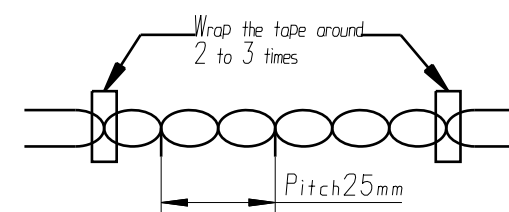

8. Wiring harness protection refers to the following items.

- | | |
|--------------------------------|-------------------------------------|
| I Velcro tape pattern wrapping | VI Nylon woven mesh |
| II Velcro tape dot wrapping | VII PVC hose |
| III Cloth tape full wrapping | VIII Self-wrapping textile sleeve |
| IV Cloth tape pattern wrapping | IX Aluminum foil tape full wrapping |
| V ALL wrapped with duct tape | |